




Made in EU



TAB-LED *series*


LED HYMN BOARDS FOR CHURCHES



© 2023 Phoenix Professional Audio GmbH | All rights reserved - Technical changes and errors excepted.



www.phoenix-pa.com

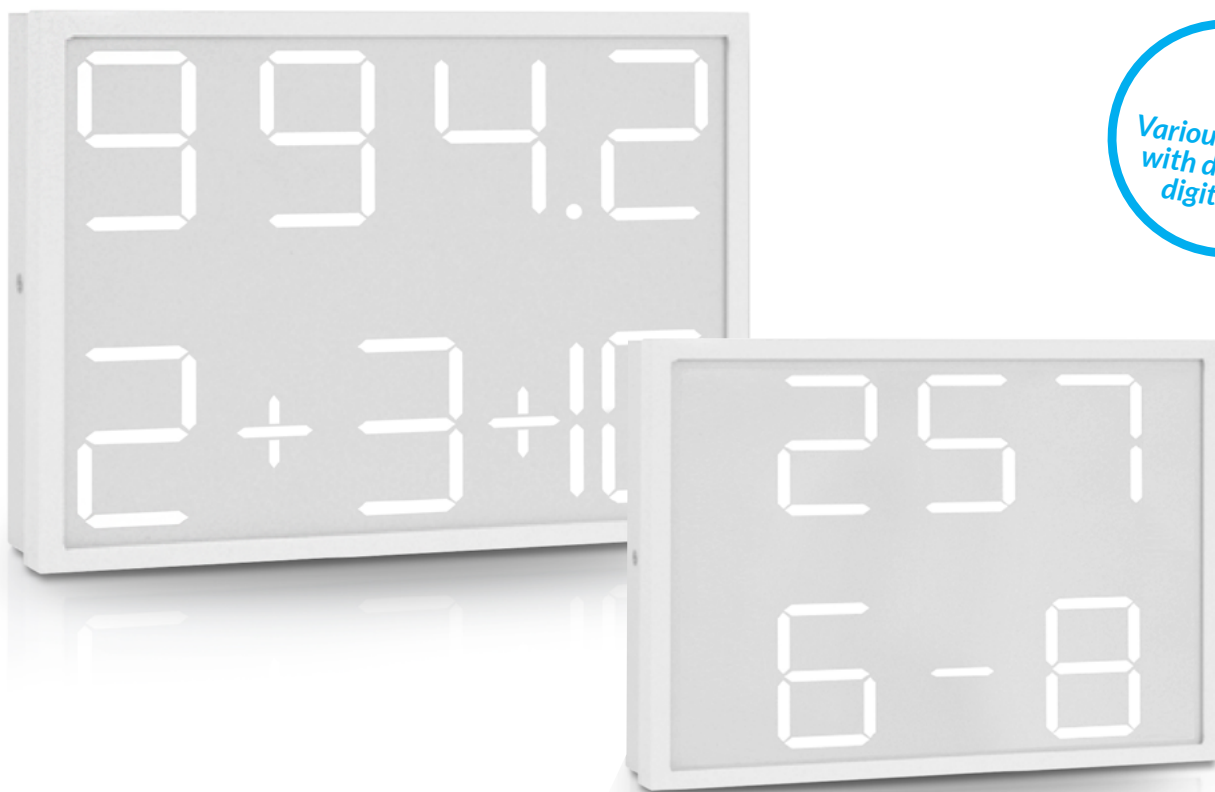

TAB-LED series

LED Hymn Boards for Churches

Fig.:
left Model TAB-LED-150
right Model TAB-LED-60

LED DISPLAY **VERY FLAT HOUSING** **RAZOR-SHARP DISPLAY**

Hymn boards with LED display in a stable aluminum housing for surface mounting with numerous accessories.

Thanks to their elegant, flat housing, the **TAB-LED hymn boards** for churches and communities fit harmoniously into the spatial architecture. The front of the hymn board has a **glare-free coating**. The song numbers or verses on the front of the board are **evenly lit** and therefore **easy to read** - even when viewed from the side.

Depending on the model, the series is designed for **distances from 5 to approx. 70 meters** and offers three different digit sizes (**number height 150, 100 and 60 mm**, depending on the model).

Models

TAB-LED-60 LED Hymn Board / Digit height 60 mm
for smaller distances up to approx. 20 meters

TAB-LED-100 ... LED Hymn Board / Digit height 100 mm
for distances up to approx. 40 meters

TAB-LED-150 ... LED Hymn Board / Digit height 150 mm
for larger distances up to approx. 70 meters

- Very flat light board
- Energy-saving LED technology
- Excellent readability even from greater distances and from side view
- Razor-sharp display of songs & verses
- Easy brightness control
- Integrated lightning protection
- Stable ALU housing
- User-friendly operation

Specials

The **brightness** is controlled automatically via the **ambient sensor** in the hymn board. Alternatively, the board can be **dimmed** using the optionally available **radio remote control TAB-CONTROL-R**.

Song numbers / verses are **displayed in white**. On request, we also offer our TAB-LED hymn boards with numeric displays in red and yellow.



Fig.: OPTIONAL ACCESSORY:
Radio remote control
TAB-CONTROL-R



TAB-LED series - Continued from previous page

The **stable ALU housing** of the TAB-LED hymn boards is powder-coated in white RAL 9016 matt. On request, the hymn boards can also be delivered in other RAL colors.

A special switching technology (electronic SOFT START) ensures an **extra long lifespan for the LED**.

The TAB-LED hymn boards are powered by **230 VAC**. Operation with 110 VAC is possible on request.

Each hymn board has built-in **lightning protection**.

OPTIONAL ACCESSORIES:

Wall swivel holder

Optional TAB-LED accessories include the **manual wall swivel holder TAB-WS-M** and the **automatic wall swivel holder TAB-WS-E** with electric drive and wireless remote control.

Wireless remote control

The hymn boards can be conveniently controlled wirelessly using the separately available **radio remote control TAB-CONTROL-R** (dimensions: W-33.5 x H-88 x L-152 mm).

The display (2 lines) of the radio remote control shows numbers **large** and very easy to read and has a **continuously adjustable automatic switch-off** (the remaining expiry time is shown in the display). There are **50 storage spaces** available.

The control panel is powered by **2 built-in NiMH batteries** (AA 1.2 V). The **battery level** is shown in the display in percent. A **mains charger** is included. The radio remote control works

wirelessly via a built-in 868 MHz radio transmitter module, with a **range of approx. 300 m**.

Wireless receiver

For the purposes of the wireless connection between the hymn board and the radio remote control, the **TAB-DLF wireless radio receiver** is installed in the TAB-LED hymn board. The radio receiver is available separately.

Flush-mounted housing

The TAB LED hymn boards are also optionally available for **flush-mounting** with the corresponding **TAB-UP flush-mounted housing**.





Fig.: Flush-mounted housing TAB-UP-60

Technical data	TAB-LED-60	TAB-LED-100	TAB-LED-150
Weight	approx. 3.5 kg	approx. 5 kg	approx. 7 kg
Distance	up to 20 m	up to 40 m	up to 70 m
Dimensions (Wx HxL in mm)	300x210x40	400x300x40	570x440x40
Digit height	60 mm	100 mm	150 mm

Accessories (optional)

TAB-WS-M	Manual wall swivel holder
TAB-WS-E	Electric wall swivel holder
TAB-CONTROL-R	Radio remote control
TAB-DLF	Radio receiver
TAB-UP	Flush-mounted housing

Fig.: below Conveniently operate the TAB-LED hymn boards wirelessly via radio remote control TAB-CONTROL-R

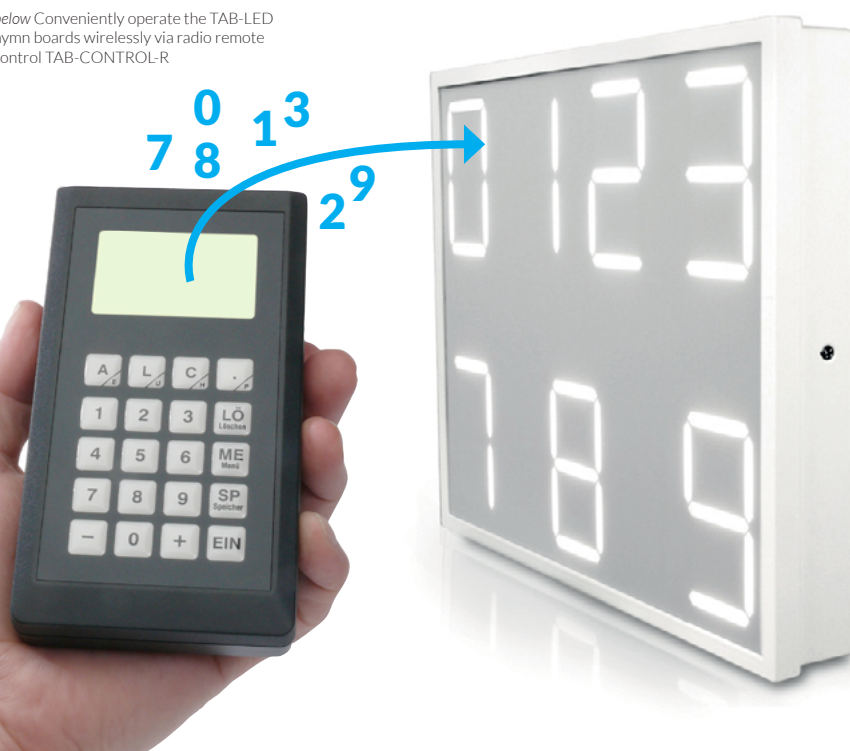



ONLINESHOP *Link:*



TAB-LED series



www.phoenix-pa.com • www.phoenix-pa.com/shop

Tel.: +49 (0) 8061 495 603 - 0 | Fax: +49 (0) 8061 495 603 - 1 | E-Mail: info@phoenix-pa.com

PHOENIX PROFESSIONAL AUDIO GMBH

Gewerbepark Markfeld 5
83043 Bad Aibling
Germany