





MX-3

3-CHANNEL MIXING PREAMP









MX-3

3-Channel mixing preamp

2 X MIC / 1 X LINE LF/HF-EQ PHANTOM FLUSH / SURFACE MOUNT

Compact 3-channel mixing preamp MX-3 with 2 x MIC, 1 x LINE input (mixable), XLR, phantom power and LED display.

The preamp MX-3 is equipped with high-quality XLR mounting sockets (Neutrik), switchable phantom power 18 V for condenser microphones, LOW / HIGH ON-OFF jumpers per mic input and separate LF / HF sound control for each of the three inputs and master section.

Universal application, easy operation and a high overload resistance characterize the compact preamplifier.

Separate sound control ensures precise room equalization and perfect adaptation to room acoustics.

The output of the MX-3 is **transformer balanced** (galvanic isolation) with **select jumper for 0 dB or +6 dB signal setting** and provides **high noise immunity** at +6 dB setting of the output, aso that the signal feedback can be done by JY (ST) Y with 2x2x0.6 line.

The device is suitable for flush and surface installation.

The MX-3 preamplifier conforms to the Electromagnetic Compatibility Directive 89/336/EEC and the Low Voltage Directive 73/23/EEC.

Technical Details	MX-3
Current consumption max.	60 mA
Dimensions	approx. W-141 x H-182 x D-50 (mm)
EQ	+/- 12 dB
Frequency response	40 Hz - 20,000 Hz
Line inputs	unbalanced 1 x line inputs 0 dB, 0.707 \ / 10 kOhm, CINCH
Mic. inputs	balanced 2 x mic inputs (0.5 - 5 mV / 1 kOhm), XLR standard
Outputs	1 x balanced 0 dB or +6 dB
Phantom power	18 V
Power supply	24 VDC, 1A, 24 W
THD	below 0.3%
Weight	approx. 0.5 kg

Further details in the online shop:





MX-3 >>

Specials



Compact & universally applicable



Suitable for flush-mount & surface-mount



Easiest operation

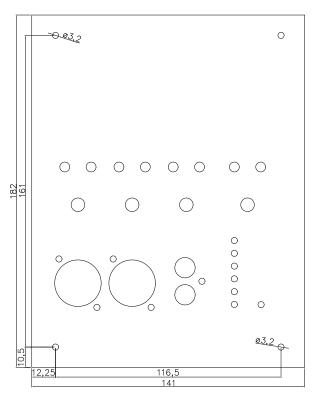


Fig.: Dimensional drawing MX-3

Accessories

MP-MX-3-AP	Lockable surface-mount housing
MP-MX-3-UP2	Lockable flush-mount housing
MP-MX-3-UP	Flush-mount housing

ONLINE SHOP *link*:







www.phoenix-pa.com • www.phoenix-pa.com/shop

Tel.: +49 (0) 8062 908 49 84 | Fax: +49 (0) 8062 728 37 37 | E-Mail: info@phoenix-pa.com

PHOENIX PROFESSIONAL AUDIO GMBH

Hermann-Oberth-Str. 12 D-83052 Bruckmühl Germany